

TECHNICAL DATASHEET 40W~48W 12v Series Adapter

FPS040~48 RHAN3 Series





FPS040~48 RHAN3 Series

FEATURES

- · Certified IEC 62368-1 & CB 60950-1
- · Peak current function
- Meet Energy Efficiency DOE Level VI
- Meet Code of Conduct Version 5 Tier 2
- High Reliability
- · Low Profile
- · Over Current Protection
- · Over Temperature Protection
- Over Voltage Protection
- With PFC Circuit

INPUT SPECIFICATIONS

N/A

3Sec

See rating chart

regulation \geq 5ms

current limiting device)

SAFETY STANDARD APPROVAL



At 100Vac / full load, output voltage shall remain regulation \leq

At 100Vac or 240Vac / full load, output voltage shall remain

100Vac, 240Vac / full load , Shall be less than the rating of

adapter critical component (including rectifiers, fuse surge and

adapter critical component, follow FSP specification (adapter))

DESCRIPTION

This product is a 40~48 watts AC to DC adapter intended for use in IPC systems, embedded systems, printers, monitors, Charging system and POS systems, that have a high wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

Power factor:

Hold-up time:

Inrush current:

Power turn-on time

Efficiency:

INPUT SPECIFICATIONS

Input voltage: Input frequency: Input current: No load power consumption Touch current:

90-264 VAC 47-63 Hz 100Vac, 240Vac / full load \leq 1.5A 115Vac, 230Vac $\leq 0.075W$ 264Vac / 50Hz \leq 0.25mA

OUTPUT SPECIFICATIONS


| OUTPUT SPECIFICATIONS | | Operating altitude: | 5000 meters above sea level | |
|---|---|--|--|--|
| Output voltage/current: | See rating chart See rating chart | Withstand voltage: | Between AC input and secondary applied DC 4242V, test time 1 minute, cut off current shall be less than 10mA 100Vac, 240Vac / full load, 300,000 hours at 25°C, standard | |
| Total output power: Protection: | | MTBF: | | |
| Over voltage: | The adapter will enter into shut down that means no output while over voltage happened at output terminal that caused by internal fault, the output trip voltage shall not exceed 18 vlots.That will be return to normal state by AC reset | EMC Performance: EN55032 FCC VCCI EN61000-3-2 EN61000-3-3 | SR332 Class B conducted, class B radiated Class B conducted, class B radiated Class B conducted, class B radiated N/A (<75W) Meet regulation | |
| Short circuit & Over current: | When an internal fault occurs, or an external fault is applied to the output, the power suppy shall shut down and | EN61000-4-3 | Air discharge: ±15KV,contact discharge: ±8KV, meet criterion A 80 ~1000 MHz,3V/m,80% AM(1kHz),meet criterion A Impulse: ± 1kV applied to L,N,meet criterion A | |
| Our to man another to | latch. | EN61000-4-4 EN61000-4-5 | ±1kV applied differential mode, meet criterion A, ±2kV applied common mode, meet criterion A | |
| Over temperature: | The power supply will enter into shut down while the abnormal thermal rise occurs. That will be return to normal state by AC reset. | EN61000-4-6 EN61000-4-8 EN61000-4-11 | 0.15 ~ 80 MHz,3Vrms,80% AM(1kHz),meet criterion A 50 Hz or 60Hz,1A/m,meet criterion A Voltage Dips : | |
| Brown-out | Shutdown and no damage | | >95% reduction for 0.5 period,meet criterion B 30% reduction for 25 period,meet criterion C | |
| Environment Working TEMP. | 0~70°C (> 40°C de-rating) | Power de-rating: | Voltage Interruptions : >95% reduction for 250 period,meet criterion C | |
| Storage TEMP. Working Humidity Storage Humidity | -20∼+80°C 20∼80% RH non-condensing 10∼90% RH non-condensing | FSP040-RHAN3 | 100Vac or 240Vac, 0°C to 40°C,100% load,50°C,100% load,60°C,80% load,70°C,70% load(Shall be less than the rating of adapter critical component, follow FSP specification (adapter)) | |
| | | FSP042-RHAN3 | 100Vac or 240Vac, 0°C to 40°C,100% load,50°C,100% load,60 °C,100% load,70°C,80% load (Shall be less than the rating of adapter critical component, follow FSP specification (adapter)) | |
| | | FSP048-RHAN3 | 100Vac or 240Vac,0°C to 40°C,100% load,50°C,100% load,60 °C,90% load,70°C,75% load (Shall be less than the rating of | |




TECHNICAL DATASHEET **40W~48W 12v Series Adapter** FPS040~48 RHAN3 Series



INPUT VOLTAGE DERATING CURVE

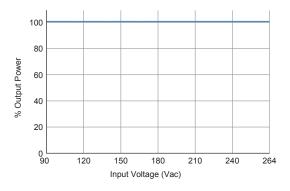

OUTPUT POWER DERATING CURVE

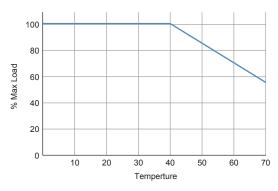

OUTPUT VOLTAGE/CURRENT RATING CHART


| Model | Output Voltage | Output Current | AC Inlet | Efficiency | |
|--------------|-------------------|-------------------|----------|---------------|-----------------|
| | | | | DOE(Level VI) | CoC V5 (Tier 2) |
| FSP040-RHAN3 | 12V | 3.33A | C14 | 87.59% | 88.59% |
| FSP042-RHAN3 | 12V | 3.5A | C14 | 87.66% | 88.71% |
| FSP048-RHAN3 | 12V | 4A | C14 | 87.77% | 88.97% |



TECHNICAL DATASHEET 40W~48W 12v Series Adapter FPS040~48 RHAN3 Series



MECHANICAL SPECIFICATIONS

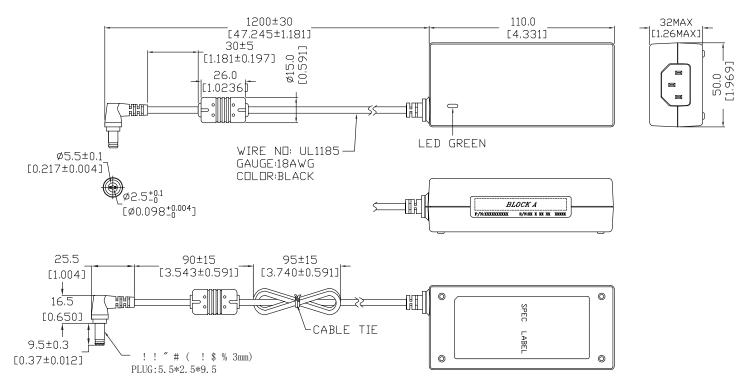

CONNECTOR SPECIFICATIONS

