
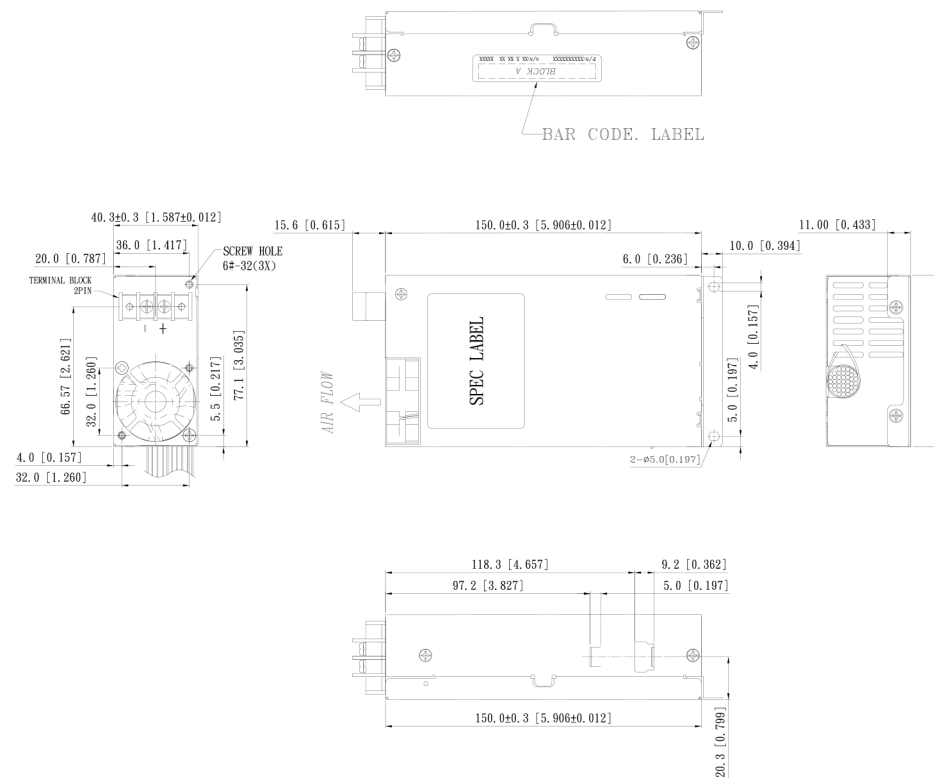


NOTES :

1. OUTLINE DIMENSION : 150*81.5*40.3mm[5.906*3.209*1.575inch]
2. CHASSIS MATERIAL : SECC, t = 0.6±0.05mm[0.024±0.002inch]
COVER MATERIAL : SECC, t = 0.6±0.05mm[0.024±0.002inch]
3. OUTPUT CABLE:
P1 : WST P20-I42002K11D+P4-I42002K11D L=250±15 mm[9.842±0.59] (OR EQUIVALENT)
P2/P3 : AMP 171822-4 L=400±25mm[15.748±787] (OR EQUIVALENT)
P4/P5 : AMP 1-480424-0 L=200±10mm[7.874±0.394] (OR EQUIVALENT)
P6/P7 : MOLEX SD-67582-001 L=480±20mm[18.898±0.787] (OR EQUIVALENT)
P8 : MOLEX 39-01-2040 L=430±20mm[16.535±0.787] (OR EQUIVALENT)
4. PIN ASSIGNMENT :

| 版本 | 描述 | 日期 |
|----|--------|------------|
| 2 | P1圖面更新 | 21/Jul/15' |
| 3 | | |

| REF. ID. | PIN NO. | SIGNAL | WIRE COLOR | GAUGE | CONNECTOR TYPE | CABLE LENGTH mm[inch] |
|----------|---------|---------|------------|--------|---|--------------------------|
| P1 | 1 | +3.3VDC | ORANGE | 18 | P20-I42002K11D+ P4-I42002K11D or EQUIV. | 250±15 [9.842±0.59] |
| | 2 | +3.3VDC | ORANGE | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5VDC | RED | 18 | | |
| | 5 | COM | BLACK | 18 | | |
| | 6 | +5VDC | RED | 18 | | |
| | 7 | COM | BLACK | 18 | | |
| | 8 | PWR_OK | GRAY | 20 | | |
| | 9 | +5Vsb | PURPLE | 18 | | |
| | 10 | +12V | YELLOW | 18 | | |
| | 11 | +12V | YELLOW | 18 | | |
| | 12 | +3.3VDC | ORANGE | 18 | | |
| | 13 | +3.3VDC | ORANGE | 18 | | |
| | 14 | -12VDC | BLUE | 20 | | |
| | 15 | COM | BLACK | 18 | | |
| | 16 | PS-ON | GREEN | 20 | | |
| | 17 | COM | BLACK | 18 | | |
| | 18 | COM | BLACK | 18 | | |
| | 19 | COM | BLACK | 18 | | |
| | P2 | 1 | +12V | YELLOW | | |
| 2 | | COM | BLACK | 22 | | |
| 3 | | COM | BLACK | 22 | | |
| 4 | | +5V | RED | 22 | | |
| P3 | 1 | +12V | YELLOW | 22 | AMP 171822-4 or EQUIV. | 400±20 [15.748±0.787] |
| | 2 | COM | BLACK | 22 | | |
| | 3 | COM | BLACK | 22 | | |
| | 4 | +5V | RED | 22 | | |
| P4 | 1 | +12V | YELLOW | 18 | AMP 1-480424-0 or EQUIV. | 200±10 [7.874±0.394] |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| P5 | 1 | +12V | YELLOW | 18 | AMP 1-480424-0 or EQUIV. | 200±10 [7.874±0.394] |
| | 2 | COM | BLACK | 18 | | |
| | 3 | COM | BLACK | 18 | | |
| | 4 | +5V | RED | 18 | | |
| P6 | 1 | +3.3V | ORANGE | 20 | MOLEX SD-67582-001 or EQUIV. | 480±20 [18.898±0.787] |
| | 2 | COM | BLACK | 20 | | |
| | 3 | +5V | RED | 20 | | |
| | 4 | COM | BLACK | 20 | | |
| P7 | 1 | +12V | YELLOW | 20 | MOLEX SD-67582-001 or EQUIV. | 480±20 [18.898±0.787] |
| | 2 | COM | BLACK | 20 | | |
| | 3 | +5V | RED | 20 | | |
| | 4 | COM | BLACK | 20 | | |
| P8 | 1 | +12V | YELLOW | 20 | MOLEX 39-01-2040 or EQUIV. | 430±20 [16.535±0.787] |
| | 2 | COM | BLACK | 18 | | |
| | 3 | +12V | YELLOW | 18 | | |
| | 4 | +12V | YELLOW | 18 | | |

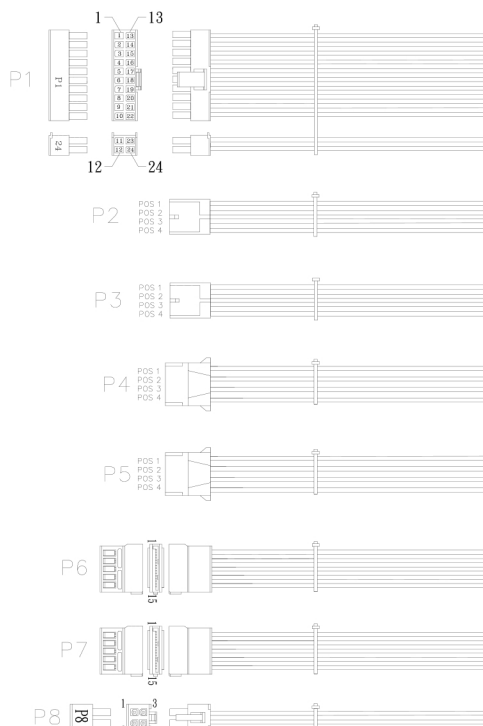

P/N.: 9PD2000225

| | | | |
|-------------------------|---------|--------------|------------|
| MODEL NO. : FSP200-62DL | OUTLINE | SHEET:1 OF 1 | REV:2 |
| R&D(SH) | P E | DRAWN | DATE |
| INTERIOR COUNTERSIGN: | | LIW | 21/Jul/15' |

SCALE: 1:1
UNIT:mm[inch]

