



| REF. ID. | PIN NO | SIGNAL      | WIRE COLOR | GAUGE | CONNECTOR TYPE  | CABLE LENGTH |  |  |
|----------|--------|-------------|------------|-------|---|--------------|--|--|
| P1       | 1      | +3.3VDC     | ORANGE     | 18    | MOLEX<br>39-01-2240<br>or EQUIV.                        | 550±10mm     |  |  |
|          | 2      | +3.3VDC     | ORANGE     | 18    |   |              |  |  |
|          | 3      | COM         | BLACK      | 18    |   |              |  |  |
|          | 4      | +5VDC       | RED        | 18    |   |              |  |  |
|          | 5      | COM         | BLACK      | 18    |   |              |  |  |
|          | 6      | +5VDC       | RED        | 18    |   |              |  |  |
|          | 7      | COM         | BLACK      | 18    |   |              |  |  |
|          | 8      | PW_OK       | GRAY       | 24    |   |              |  |  |
|          | 9      | +5Vsb       | PURPLE     | 20    |   |              |  |  |
|          | 10     | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 11     | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 12     | +3.3VDC     | ORANGE     | 18    |   |              |  |  |
|          | 13     | +3.3VDC     | ORANGE     | 18    |   |              |  |  |
|          | 14     | +3.3V Sense | BROWN      | 24    |   |              |  |  |
|          | 15     | +12VDC      | BLUE       | 24    |   |              |  |  |
|          | 16     | COM         | BLACK      | 18    |   |              |  |  |
|          | 17     | PS_ON#      | GREEN      | 24    |   |              |  |  |
|          | 18     | COM         | BLACK      | 18    |   |              |  |  |
|          | 19     | COM         | BLACK      | 18    |   |              |  |  |
|          | 20     |             |            |       |   |              |  |  |
|          | 21     | +5VDC       | RED        | 18    |   |              |  |  |
|          | 22     | +5VDC       | RED        | 18    |   |              |  |  |
|          | 23     | +5V Sense   | RED        | 24    |   |              |  |  |
|          | 24     | +5VDC       | RED        | 18    |   |              |  |  |
| P2       | 1      | COM         | BLACK      | 18    | WST<br>P4-I42002BK3B<br>+<br>P4-I42002BK4B<br>or EQUIV. | 600±10mm     |  |  |
|          | 2      | COM         | BLACK      | 18    |   |              |  |  |
|          | 3      | COM         | BLACK      | 18    |   |              |  |  |
|          | 4      | COM         | BLACK      | 18    |   |              |  |  |
|          | 5      | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 6      | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 7      | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 8      | +12V        | YELLOW     | 18    |   |              |  |  |
| P3       | 1      | +12V        | YELLOW     | 18    | WST<br>P8-I42002K21B-B<br>or EQUIV.                     | 500±10mm     |  |  |
|          | 2      | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 3      | +12V        | YELLOW     | 18    |   |              |  |  |
|          | 4      | COM         | BLACK      | 18    |   |              |  |  |
|          | 5      | COM         | BLACK      | 18    |   |              |  |  |
|          | 6      | COM         | BLACK      | 18    |   |              |  |  |
|          | 7      | COM         | BLACK      | 18    |   |              |  |  |
|          | 8      | COM         | BLACK      | 18    |   |              |  |  |
| P4       | 1      | +12V        | YELLOW     | 20    | WST<br>P8-I42002K21B-B<br>or EQUIV.                     | 155±10mm     |  |  |
|          | 2      | +12V        | YELLOW     | 20    |   |              |  |  |
|          | 3      | +12V        | YELLOW     | 20    |   |              |  |  |
|          | 4      | COM         | BLACK      | 20    |   |              |  |  |
|          | 5      | COM         | BLACK      | 20    |   |              |  |  |
|          | 6      | COM         | BLACK      | 20    |   |              |  |  |
|          | 7      | COM         | BLACK      | 20    |   |              |  |  |
|          | 8      | COM         | BLACK      | 20    |   |              |  |  |
| P5       | 1      | COM         | BLACK      | 20    | MOLEX<br>SD-67582-001<br>or EQUIV.                      | 500±10mm     |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | +5VDC       | RED        | 20    |   |              |  |  |
|          | 4      | COM         | BLACK      | 20    |   |              |  |  |
|          | 5      | +12V        | YELLOW     | 20    |   |              |  |  |
| P6       | 1      | COM         | BLACK      | 20    | MOLEX<br>SD-67582-001<br>or EQUIV.                      | 155±10mm     |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | +5VDC       | RED        | 20    |   |              |  |  |
|          | 4      | COM         | BLACK      | 20    |   |              |  |  |
| P7       | 1      | COM         | BLACK      | 20    |   |              |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | +5VDC       | RED        | 20    |   |              |  |  |
|          | 4      | COM         | BLACK      | 20    |   |              |  |  |
| P8       | 1      | +12V        | YELLOW     | 20    |   |              |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | COM         | BLACK      | 20    |   |              |  |  |
|          | 4      | +5VDC       | RED        | 20    |   |              |  |  |
| P9       | 1      | +12V        | YELLOW     | 20    | AMP<br>1-480424-0<br>or EQUIV.                          | 500±10mm     |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | COM         | BLACK      | 20    |   |              |  |  |
|          | 4      | +5VDC       | RED        | 20    |   |              |  |  |
| P10      | 1      | +12V        | YELLOW     | 20    | AMP<br>1-480424-0<br>or EQUIV.                          | 155±10mm     |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | COM         | BLACK      | 20    |   |              |  |  |
|          | 4      | +5VDC       | RED        | 20    |   |              |  |  |
| P11      | 1      | +5VDC       | RED        | 20    | AMP<br>171822-4<br>or EQUIV.                            | 155±10mm     |  |  |
|          | 2      | COM         | BLACK      | 20    |   |              |  |  |
|          | 3      | COM         | BLACK      | 20    |   |              |  |  |
|          | 4      | +12V        | YELLOW     | 20    |   |              |  |  |

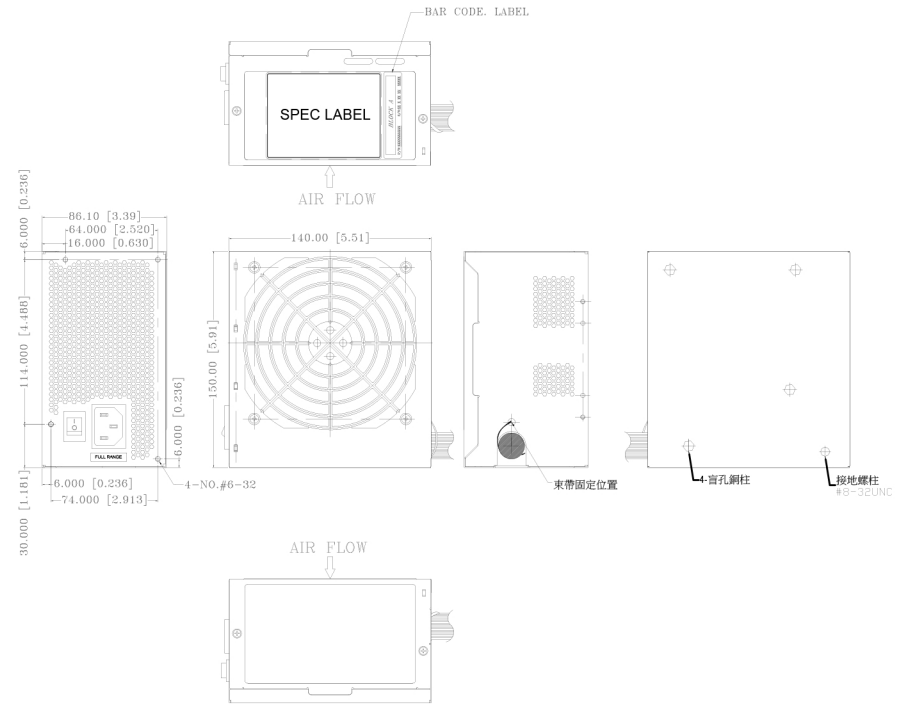

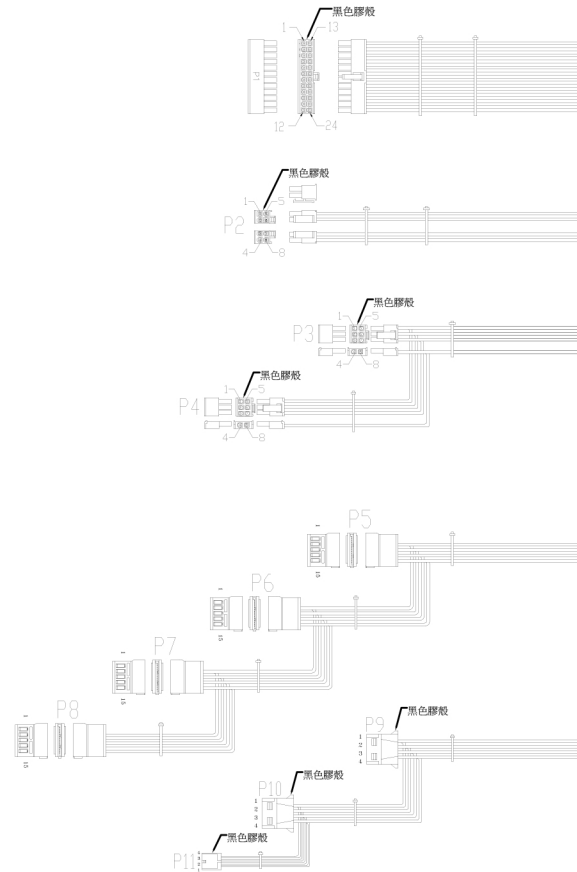

**P/N.:9PA600AD00**

| 修改版次序號 | 修改事項           | 備註 |
|--------|----------------|----|
| 1      | 取消S-ATA的+3.3V線 |    |

- NOTES:
- ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
  - 產地標籤依業務指示加貼.
  - 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01].

UNIT:mm [inch]

| MODEL NO. :FSP600-50AA,(STD0001)  |    | TITLE:ASSY  |      | SHEET: 1 OF 1 |  | REV:03 |  |
|---|----|---|------|---------------|--|--------|--|
| R&D 8   | PE | DRAWN   | DATE | AUG.23.2018   |  |        |  |
|  |    |  |      |               |  |        |  |