

TECHNICAL DATASHEET **150W Adapter** FSP150-AxxN3 Series



FSP150-AxxN3 Series

FEATURES

- · Certified IEC 62368-1 & CB 60950-1
- · Meet USA EISA 2007
- Meet Energy Efficiency DOE Level VI
- Meet Code of Conduct Version 5 Tier 2
- High Reliability
- Low Profile
- Over Current Protection
- · Over Temperature Protection
- · Over Voltage Protection
- With PFC Circuit

INPUT SPECIFICATIONS

SAFETY STANDARD APPROVAL



115Vac, 230Vac / full load ≥ 0.9

61000-3-2 must be present.

Power turn-on time At 100Vac / full load, output voltage shall remain

remain regulation \ge 10ms 100Vac, 240Vac / full load

See rating chart.

Provisions for adding harmonic reduction per EN

regulation \leq 3Sec At 100Vac or 240Vac / full load, output voltage shall

component, follow FSP specification (adapter))

DESCRIPTION

This product is an 150 watts AC to DC adapter intended for use in IPC systems, embedded systems, printers, monitors, POS systems and PoE application, that have a high wattage demands. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

Power factor:

Hold-up time:

Inrush current:

Efficiency:

INPUT SPECIFICATIONS

Input voltage: Input frequency: Input current: No load power consumption Touch current:

90-264 VAC 47-63 Hz 100Vac, 240Vac / full load $\leq 2A$ 115Vac , 230Vac $\leq 0.15W$ 264Vac / 50Hz $\leq 0.25mA$

OUTPUT SPECIFICATIONS

	COTT OF OF LOW IOATIC		Leakage current:	At 264Vac,50HZ \leq 0.25mA
	Output voltage/current:	See rating chart	Operating altitude:	
	Total output power:	150W		
	Protection:		Withstand voltage:	
	Over voltage:	The adapter will enter into shut down		4242V,test time 1 minute,cut off current shall be less
	0	that means no output while over voltage	MTDE	than 10mA
		happened at output terminal that caused	MTBF:	100Vac, 240Vac / full load , 300,000 hours at 25°C,
	by internal fault, the shall not exceed 19/2 That will be return to reset. Short circuit & Over current: external fault is appli supply, such that an circuit is applied to th supply shall shut dov auto-recovery mode Over temperature: The power supply with the about	by internal fault, the output trip voltage shall not exceed 19/29/37/63/66* volts. That will be return to normal state by AC		standard SR332
			EMC Performance:	
			FCC VCCI EN61000-3-2 EN61000-3-3	Class B conducted, class B radiated
				Class B conducted, class B radiated
				Class B conducted, class B radiated
				Meet class D
		supply, such that an overload or short		Meet regulation
		circuit is applied to the output, the power supply shall shut down and enter auto-recovery mode. The power supply will enter into shut down while the abnormal thermal rise occurs. That will be return to normal		Air discharge: ±15 KV,contact discharge: ±8KV, meet
			EN61000-4-3 EN61000-4-4 EN61000-4-5 EN61000-4-6	criterion A
				80 ~1000 MHz, 3V/m, 80% AM(1kHz), meet criterion A
				Impulse: ±1kV applied to L,N,meet criterion A
				± 1kV applied differential mode, ±2kV applied common
				mode, meet criterion A
				0.15 ~ 80 MHz,3Vrms,80% AM(1kHz),meet criterion A
	Brown-out	Set at 60Vac~70Vac	EN61000-4-8	50 Hz or 60Hz,1A/m,meet criterion A
	Environment		EN61000-4-11 Power de-rating:	Voltage Dips :
	Working TEMP.	0~70°C (> 40°C de-rating)		>95% reduction for 0.5 period, meet criterion B
		orage TEMP20~+80°Corking Humidity20~80% RH non-condensing		30% reduction for 25 period, meet criterion C
	Working Humidity Storage Humidity			Voltage Interruptions :
				>95% reduction for 250 period, meet criterion C
				100Vac or 240Vac,0°C to 40°C,100% load,50°C,85%
				load,60°C,70% load,70°C,55% load
				(Shall be less than the rating of adapter critical

NOTES:

*Volts express by order of 150-AHxN3/ ABxN3/ AAxN3 / AFxN3/ AWxN3


© 2018 FSP Group. All Rights Reserved. All trademarks are registered to their respective owners. 2018.11 spec




TECHNICAL DATASHEET **150W Adapter** FSP150-AxxN3 Series



INPUT VOLTAGE DERATING CURVE



OUTPUT POWER DERATING CURVE



OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output Voltage	Output Current	AC Inlet	Efficiency		Over Voltage
woder				DOE(Level VI)	CoC V5 (Tier 2)	Protection
FSP150-AHAN3	12V	12.5A	C14	≥88%	≥89%	19 Volts
FSP150-AHBN3	12V	12.5A	C6			
FSP150-ABAN3	19V	7.89A	C14			29 Volts
FSP150-ABBN3	19V	7.89A	C6			
FSP150-AAAN3	24V	6.25A	C14			37 Volts
FSP150-AABN3	24V	6.25A	C6			
FSP150-AFAN3	48V	3.13A	C14			63 Volts
FSP150-AFBN3	48V	3.125A	C6			
FSP150-AWAN3	54V	2.78A	C14			66 Volts
FSP150-AWBN3	54V	2.78A	C6			




TECHNICAL DATASHEET **150W Adapter** FSP150-AxxN3 Series




MECHANICAL SPECIFICATIONS

FSP150-AXAN3

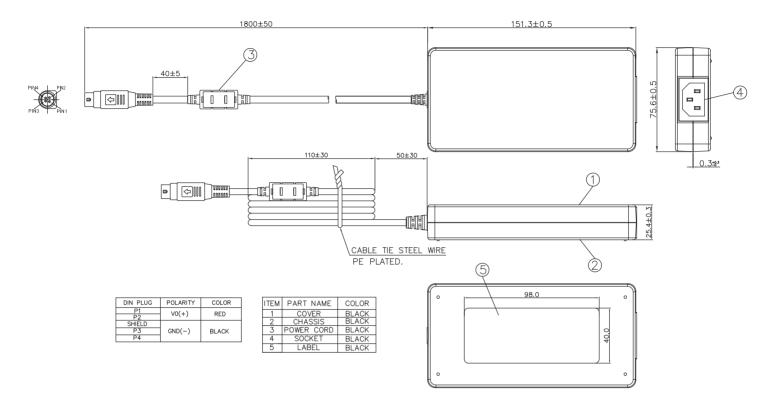

FSP150-AXBN3

3

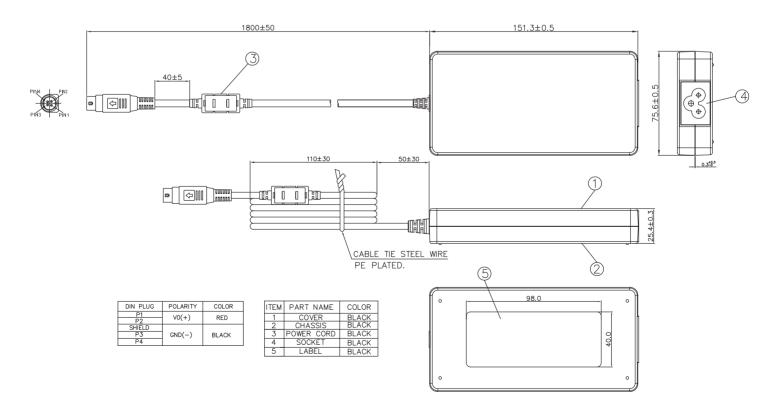



4

TECHNICAL DATASHEET **150W Adapter** FSP150-AxxN3 Series



CONNECTOR SPECIFICATIONS

